



For 3/4" board thickness

TruBalance 3/4"


Classic 3/4"

For 1/2" board thickness

Engineered 1/2"

STAIR NOSING


7-foot (2,134 mm) nosing for staircase or podium.

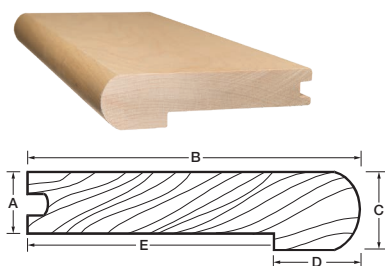

Round edged stair nosing 3/4"

Dimensions


A	3/4"	19 mm
B	4-1/4"	108 mm
C	1-1/16"	27 mm
D	1"	25 mm
E	3-1/4"	83 mm

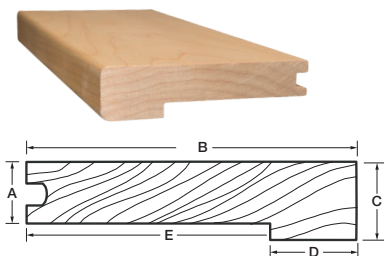

Square edged stair nosing 3/4"

Dimensions


A	3/4"	19 mm
B	4-1/4"	108 mm
C	1-1/16"	27 mm
D	1"	25 mm
E	3-1/4"	83 mm

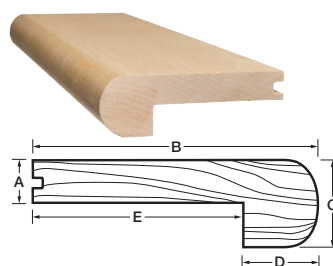

Round edged stair nosing 1/2"

Dimensions

A	1/2"	13 mm
B	3-1/4"	83 mm
C	1"	25 mm
D	7/8"	22 mm
E	2-3/8"	60 mm

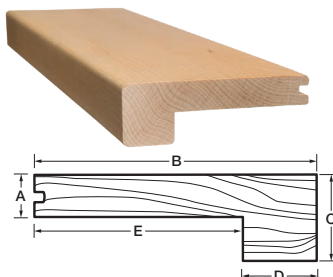


Square edged stair nosing 1/2"

Dimensions

A	1/2"	13 mm
B	3-1/4"	83 mm
C	1"	25 mm
D	7/8"	22 mm
E	2-3/8"	60 mm

REDUCER


7-foot (2,134 mm) reducer for even floor transition.

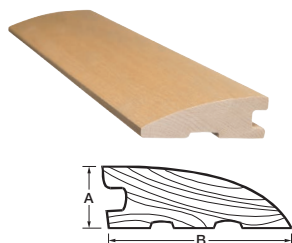

Round reducer 3/4"

Dimensions

A	3/4"	19 mm
B	2-1/4"	57 mm



Round reducer 1/2"

Dimensions

A	1/2"	13 mm
B	1-1/2"	38 mm
C	1/8"	3 mm



For 7/16" board thickness



Lock 7/16"

Board thickness



TruBalance 3/4"



Classic 3/4"



Engineered 1/2"




Lock 7/16"

STAIR NOSING

7-foot (2,134 mm) nosing for staircase or podium.

MULTIFUNCTION

7-foot (2,134 mm).

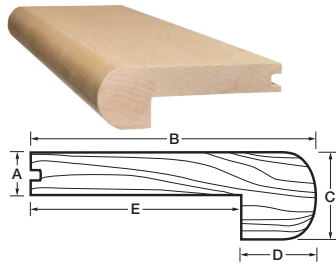


Round edged stair nosing 7/16"

For glued installation

Dimensions

A	7/16"	11 mm
B	3-1/4"	83 mm
C	1"	25 mm
D	7/8"	22 mm
E	2-3/8"	60 mm

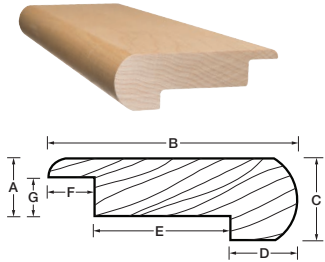

Round edged stair nosing 7/16"

For floated installation

Dimensions

A	3/4"	19 mm
B	3-1/4"	83 mm
C	1-1/16"	27 mm
D	7/8"	22 mm
E	1-3/4"	45 mm
F	5/8"	16 mm
G	1/2"	13 mm



Threshold

Dimensions

A	3/8"	10 mm
B	2-1/8"	54 mm
C	3/4"	19 mm
D	3/4"	19 mm
E	1-3/8"	35 mm




"T" Molding

Dimensions

A	3/8"	10 mm
B	1-13/16"	44 mm
C	9/16"	15 mm
D	3/8"	10 mm

REDUCER

7-foot (2,134 mm) reducer for even floor transition.




Round reducer 7/16"

For glued installation

Dimensions

A	7/16"	11 mm
B	1-1/2"	38 mm
C	1/8"	3 mm

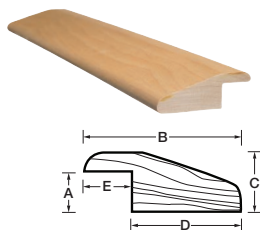


Round reducer 7/16"

For floated installation

Dimensions

A	1/2"	13 mm
B	2"	51 mm
C	3/4"	19 mm
D	1-3/8"	35 mm
E	5/8"	16 mm



Quarter round

Dimensions

A	5/8"	16 mm
B	5/8"	16 mm