m i r a g e

Hardwood Floors

ENVIRONMENTAL DATA SHEET



LOCK (3 PLY HDF CORE)

Real hardwood boards with a high density fiber core and a wood backing. 2G[™] angling system for easy installation¹.

¹2G[™] is a patented technology invented by Välinge Innovation AB.

VALIDATED ECO-DECLARATION

PRODUCT SPECIFICATIONS

Reference 3 ply HDF core (Lock)

Final manufacturing location Saint-Georges, QC G5Y 8J5 or Toronto, ON M8Z 1K8 , CANADA

Components HDF, hardwood, veneer, adhesives and finishes.

ATTRIBUTES

Recycled Content Pre-consumer: 58.5% - 61.3% Post-consumer: 0%

Sourcing of raw materials The source of extraction and/or location of raw materials has been documented for 91% of final product weight.

Certified Wood	PEFC 54327
Rapidly renewable materials	-
Biobased materials	-

ENVIRONMENTAL IMPACTS

Life Cycle Assessment

Reference service life

Product's carbon footprint

Environmental Product Declaration ISO 14025:2006

INGREDIENTS AND EMISSIONS

Declaration of chemical
ingredients1,000 ppmType of declaration
Health Product Declaration®
April 2021- April 2024Emission testsComplying with the CDPH

Emission (coto	complying with the obi th
VOCs	CDPH test results ≤ 0.5 mg/m ³
Formaldehyde	CDPH test results ≤ 9.0 ug/m ³

Others EPA TSCA title VI compliant

©Copyright 2016 Vertima inc.

TECHNICAL PERFORMANCES

Performance tests

Relevant performances tests list. Fire reaction available on request.

MANUFACTURER'S ENVIRONMENTAL MANAGEMENT

ISO 14001 Certification

Extended Producer Responsibility (Take Back Program)

Corporate Sustainability Report (CSR : GRI, ISO 26000, BNQ 21000 or others)

CERTIFICATIONS AND CONFORMITIES





Lacey Act

Designed and manufactured in North America, Mirage Floors are synonymous with superior quality, beauty, durability and guarantee product consistency, added value, and lifelong good looks. Mirage epitomizes attention to detail and the desire to create a product in perfect harmony with its environment. For more than 35 years, Mirage has been committed to operating in an environmentally responsible manner in order to ensure sustainable development for current and future generations.

1255, 98th Street, Saint-Georges, QC G5Y 8J5 CANADA www.miragefloors.com

MasterFormat®: **09 64 00** Validated Eco-Declaration: **VED15-0501-03** Original issue date: **06/2009** Period of validity: **08/2021** to **08/2022**



3 PLY HDF CORE (LOCK)





Characteristics

- Boards with uniform thicknesses and widths
- Micro-V joint on all four sides of the board
- Radiant heat approved for most species

ATTRIBUTES

RECYCLED CONTENT

Final product	Weight ratio	Pre-consumer	Post-consumer
3 ply HDF core (Lock)	100%	58.5% - 59.6%	0%
Component (with recycled content)	Weight ratio	Pre-consumer	Post-consumer
HDF – Supplier #1	76.0%	78.4%	0%
HDF – Supplier #2	76.0%	77.0%	0%

Validated Eco-Declaration - Recycled Content

Methodology: on-site audit, supply chain evaluation, analysis and validation of the recycled content data according to the weight ratio of each of the components used in manufacturing the final product.

Vertima's procedure: VERT-032008-01, Second Edition.

SOURCING OF RAW MATERIALS

Weight ratio	Final manufacturing location
100%	Saint-Georges, QC G5Y 8J5 CANADA or Toronto, ON M8Z 1K8 CANADA

Validated Eco-Declaration – Sourcing of raw materials

Methodology: on-site audit, supply chain evaluation, analysis and validation of the sourcing of raw materials data according to the weight ratio of each of the components used in manufacturing the final product.

Vertima's procedure: VERT-032008-02, Second Edition.

Component	Weight ratio	Extraction location	Transportation
HDF	76.0%	Various locations	Road
Hardwood	15.0%	Canada and United States	Road
Veneer	8.0%	Various locations	Road and boat
Adhesives	<1.0%	N/A	N/A
Finishes	<1.0%	N/A	N/A

The source of extraction and/or location of raw materials has been documented for 99.0% of final product weight.

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, caused in all or in part, by errors and/or omissions relative to the collection, compilation and/or interpretation of data. Copyright[®] 2016 by Vertima Inc.




3 PLY HDF CORE (LOCK)

ATTRIBUTES (CONTINUED)

SOURCING OF RAW MATERIALS (CONTINUED)



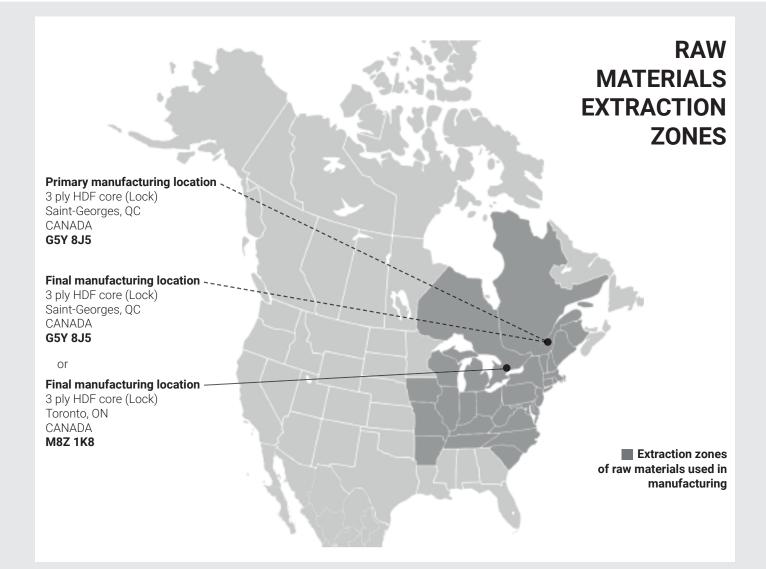

1. EXTRACTION LOCATIONS OF HDF (Details available upon request)

2. WOOD HARVEST LOCATION (Details available upon request)

Canada: Quebec, New Brunswick, Ontario.

United States: Arkansas, Connecticut, Delaware, Illinois, Indiana, Iowa, Kentucky, Maine, Maryland, Massachusetts, Michigan, Missouri, New Hampshire, New Jersey, New York, North Carolina, Ohio, Pennsylvania, Rhode Island, South Carolina, Tennessee, Vermont, Virginia, West Virginia, Wisconsin.

3. VENEER HARVEST LOCATION (Details available upon request)

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, caused in all or in part, by errors and/or omissions relative to the collection, compilation and/or interpretation of data. Copyright® 2016 by Vertima Inc.



3 PLY HDF CORE (LOCK)

ATTRIBUTES (CONTINUED)

CERTIFIED WOOD

When specified, PEFC certified 3 ply HDF core (Lock) could be available. (Contact Mirage for availability)

		Certification agency	Product covered		
	Bureau	u de normalisation du Qué	Wooden floor		
PEFC/26-31-118 Promoting Sustainable	Certified site	Certification number	Traceability method	Period of validity	
Forest Management www.pefc.org	BOA-FRANC INC. St-Georges, QC CANADA	54327	Credit system	12/21/2017 to 12/20/2022	

Validated Eco-Declaration – Certified Wood

Methodology: on-site audit, supply chain evaluation and validation of certified wood documents confirming the type of certification. Vertima's procedure: VERT-032008-03, Second Edition.

TECHNICAL PERFORMANCES

PERFORMANCE TESTS

Contact manufacturer for more details.

WARRANTY

See product detailed description.

MANUFACTURER'S ENVIRONMENTAL MANAGEMENT PROGRAM

RESPONSIBLE RAW MATERIALS PROCUREMENT REPORT

Report name
Controlled Wood Risk Evaluation

Updated annually



Validated Eco-Declaration - Supply Chain Management Report Methodology: validation of documents attesting the supply chain management report. Vertima's procedure: VERT-032009-04, First Edition.

INGREDIENTS AND EMISSIONS

EPA TSCA TITLE VI COMPLIANT



The product meets EPA TSCA title VI criterias. Contact manufacturer for more details.

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, caused in all or in part, by errors and/or omissions relative to the collection, compilation and/or interpretation of data. Copyright[®] 2016 by Vertima Inc. Validated Eco-Declaration: VED15-0501-03 Period of validity: 08/2021 to 08/2022



mi/r/gge

Hardwood Floors

3 PLY HDF CORE (LOCK)

INGREDIENTS AND EMISSIONS (CONTINUED)

DECLARATION OF CHEMICAL INGREDIENTS



Type of declaration: Health Product Declaration® (HPD®) version 2.2

Period of validity: April 2021 to April 2024

HPD name: 3 ply HDF core - St-Georges

Summary of product contents and results from screening individual chemical substances against HPD Priority Lists¹ and the GreenScreen for Safer Chemicals^{®,2}.

HPDC repository URL:

https://hpdrepository.hpd-collaborative.org/repository/HPDThumbnails/B37CAE3413FD875DC25EDE0377088A44.jpg

The presented results are specific to 3 ply HDF core prefinished at St-Georges plant. For more details about the HPD® related to 3 ply HDF core prefinished at Toronto plant and entitled "3 ply HDF core - Toronto", please consult the HPD Public repository. The Health Product Declaration® and logo is owned by the Health Product Declaration® Collaborative and is used with permission

Declaration: Prepared by Vertima inc., third party approved by HPDC Ingredients inventory threshold: 1,000 ppm Full disclosure of intentional ingredients: Yes Full disclosure of known hazards: Yes

Hazard(s) associated with the product ingredients: (Not associated with actual use of finished product)

This HPD Standard describes a declaration of product content and direct health hazards associated with exposure to its individual contents. The Declaration is not an assessment of risks associated with actual use of the product. It does not address the potential health impacts of substances used or created during manufacture that do not appear in the final product as residuals, nor substances created during combustion or other degradation processes

Highest concern GreenScreen® Benchmark: Benchmark 13

PBT (Persistent, Bioaccumulative, Toxic)
Cancer
Gene mutation
Development

Development
Reproductive

Endocrine

Neurotoxicity Mammal Land toxicity Aquatic toxicity

Skin or eye

Respiratory



¹Refer to Annex D of HPD® Open Standard Version 2.1, May 2017: http://www.hpd-collaborative.org ²GreenScreen for Safer Chemicals® method: http://www.greenscreenchemicals.org/ ³GreenScreen (GS) Benchmark scores of chemical ingredients: Benchmark 1 (Avoid, chemical of high concern), Benchmark 2 (Use but search for safer substitutes), Benchmark 3 (Use but still opportunity for improvement), Benchmark 4 (Prefer, safer chemical).

TABLE OF INGREDIENTS

Component	Role	Weight ratio	CAS ¹	GreenScreen ^{®,2}	Other applicable score (for more details refer to the HPD®)
HDF	Main element	74.2% - 78.2%	64742-61-6	LT-1	LT-P1, LT-UNK and BM-4 scores also present
Hardwood	Main element	9.7% - 15.3%	-	-	
Veneer	Back veneer	8.0% - 10.5%	-	-	
Adhesives	Assembly	0.0% -2%	Undisclosed	LT-1	LT-P1, LT-UNK, BM-3 and BM-4 scores also present
Finishes	Finishes	<1.0%	14807-96-6	BM-1	LT-1, LT-P1, LT-UNK, BM-2 and BM-4 scores also present
Stain	Color the wood	<0.5%	1333-86-4	BM-1	LT-1, LT-P1 and LT-UNK scores also present
Wood Filler	Wood Filler	<0.3%	80-05-7	BM-1	LT-P1, LT-UNK and BM-2 scores also present

¹Only the CAS numbers with the score of highest concern are listed. The complete list of substances can be found in the HPD®

²GS List Translator (LT) scores of chemical ingredients: LT-1, likely GS Benchmark 1; LT-P1, possible GS Benchmark 1; LT-U or LT-UNK, present on GS Specified Lists but there is insufficient information to classify the hazards as LT-1 or LT-P1 (does not mean the chemical is safe). Validated Eco-Declaration – Declaration of chemical ingredients

Methodology: validation of the documentation confirming the methodology and reporting of chemical ingredients.

Vertima's procedure: VERT-032009-01, Second Edition.

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, caused in all or in part, by errors and/or omissions relative to the collection, compilation and/or interpretation of data Copyright[®] 2016 by Vertima Inc.





3 PLY HDF CORE (LOCK)

INGREDIENTS AND EMISSIONS (CONTINUED)

EMISSION TESTS

Reference Standard



California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010 (Emission testing method for CA Specification 01350) Certificate number: 141106-02 (Maple) & 141106-03 (Oak) Issue Date: November 6, 2014 Final maunfacturing location: St-Georges, QC Analytical Lab: Berkeley Analytical

Acceptance Criteria and Results Demonstrating Compliance of Product Sample to Referenced Standard:

Exposure Scenario ¹	Individual VOCs of Concern ²		Formal	dehyde ³	TVOC ⁴
	Criterion	Compliant	Criterion	Compliant	Range
School Classroom	≤½ Chronic REL	Yes	≤9.0 µg/m³	Yes	≤0.5 mg/m ³
Private Office	≤½ Chronic REL	Yes	≤9.0 µg/m³	Yes	≤0.5 mg/m³
Single Family Residence (if applicable)	≤½ Chronic REL	Yes	≤9.0 µg/m³	Yes	≤0.5 mg/m³

Product Coverage5: Not applicable

Source: Berkeley Analytical - VOC Emission Test Certificate

Reference Standard



California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017 (Emission testing method for CA Specification 01350) Certificate number: 171017-01 Issue Date: October 17, 2017 Final maunfacturing location: Toronto, ON Analytical Lab: Berkeley Analytical

Acceptance Criteria and Results Demonstrating Compliance of Product Sample to Referenced Standard:

Exposure Scenario ¹	Individual VOCs of Concern ²		Formal	dehyde ³	TVOC ⁴
	Criterion Compliant		Criterion Compliant		Range
School Classroom	≤½ Chronic REL	Yes	≤9.0 µg/m³	Yes	≤0.5 mg/m³
Private Office	≤½ Chronic REL	Yes	≤9.0 µg/m³	Yes	≤0.5 mg/m ³

Product Coverage⁵: Not applicable

¹Exposure scenarios & product quantities for classroom & office are defined in Tables 4-2 – 4-5 (CDPH Std. Mtd. V1.1-2010 or V1.2-2017). ²Maximum allowable concentrations of individual target VOCs are specified in Table 4-1 (ibid). ³Maximum allowable formaldehyde concentration is $\leq 9 \ \mu g/m^3$, effective Jan 1, 2012; previous limit was $\leq 16.5 \ \mu g/m^3$ (ibid).

⁴Informative only; predicted TVOC Range in three categories, i.e., ≤0.5 mg/m³, >0.5 − 4.9 mg/m³, and ≥5.0 mg/m³.

⁵Informative and applicable only to tests of wet-applied products; grams of sample applied per square meter of substrate.

Validated Eco-Declaration—Emissions testing Methodology: validation of documents certifying the test results. Vertima's procedure: VERT-032009-02, Second Edition.

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, caused in all or in part, by errors and/or omissions relative to the collection, compilation and/or interpretation of data. Copyright[®] 2016 by Vertima Inc.

Source: Berkeley Analytical - VOC Emission Test Certificate





Page 6

3 PLY HDF CORE (LOCK)



PRODUCT CONTRIBUTION SUMMARY

LEED[®] v4 requirements for Building Design + Construction (BD+C)

New Construction and Major Renovation, Core and Shell, School, Retail, Data Centers, Warehouse and Distribution Centers, Hospitality and Healthcare.

LEED[®] v4 requirements for Interior Design + Construction (ID+C) Commercial Interiors, Retail and Hospitality.

MATERIALS AND RESOURCES		PRODUCT CONTRIBUTIONS	
MR	Building Product Disclosure and Optimization — Sourcing of Raw Materials Option 2: Leadership extraction practices (1 point) Recycled Content and see Pilot-Credits MRpc102: Legal Wood	Contribute (pilot-credits)	ATTRIBUTES Recycled Content Pre-consumer (58.5% - 61.3%) PEFC Certification (when specified)
MR	Building Product Disclosure and Optimization — Material Ingredients Option 1: Material ingredients reporting (1 point) The 3 ply HDF core (Lock) contributes to this credit due to the availability of Health Product Declarations® and is valued as 1 whole product out of the 20 needed for the purposes of credit achievement calculation.	Contribute	INGREDIENTS AND EMISSIONS HPD® version 2.2 Health Product Declaration®
INDOOR ENVIRONMENTAL QUALITY		PRODUCT CONTRIBUTIONS	
EQ	Low-Emitting Materials Option 1: Product category calculation (1-3 points) Number of points is dependent on the LEED rating system and the number of compliant categories. For the flooring category 100% of flooring must meet the requirements.	Contribute	INGREDIENTS AND EMISSIONS
			The 3 ply HDF core (Lock) has been tested according with the standard method of the California Department of Public Health (CDPH).

LEED[®] v4 requirements for homes

Applies to single family homes, multi-family (one to three stories), or multi-family (four to six stories). Includes homes and multifamily low-rise and multi-family mid-rise.

MATERIALS AND RESOURCES		PRODUCT CONTRIBUTIONS	
MR Prerequisite	Certified Tropical Wood	-	ATTRIBUTES
			To meet the prerequisite, don't select tropical species of Mirage.
MR	Environmentally Preferable Products Maximum of 4 points depending on both options in the context of each project. Option 2: Environmentally Preferable Products The final product should contain at least 25% of post-consumer recycled content or 50% of pre-consumer recycled content. Wood products must be FSC®-Certified, or USGBC-approved equivalent. See Pilot-Credits MRpc102: Legal Wood The 3 ply HDF core (Lock) meets at least 2 criterions for this option since contain at least 50% of pre-consumer recycled and the product is PEFC Certified when specified.	Contribute (pilot-credits)	ATTRIBUTES
			Recycled Content Pre-consumer (58.5% - 61.3%) PEFC Certification (when specified)
INDOOR ENVIRONMENTAL QUALITY		PRODUCT CONTRIBUTIONS	
EQ	Low-Emitting Products (0.5-3 points) At least 90% of all materials in each category must meet credit requirements.	Contribute	INGREDIENTS AND EMISSIONS
			The 3 ply HDF core (Lock) has been tested according with the standard method of the California Department of Public Health (CDPH).

It is important to consider that the total amount of possible points reflects the number of achievable points in each credit category. The product itself cannot achieve this score, as defined above, but is considered as a beneficial element in order to obtain LEED[®] credits.

The data included in this Environmental Data Sheet has been provided by the client and the suppliers, who are responsible for its veracity and its integrity. Vertima follows a rigorous protocol, including an on-site audit of the factory, an audit of the manufacturer's supply chain documentation, and the analysis and validation of all supporting documents. However, Vertima cannot be held responsible for false or misleading information that may cause any loss or damage suffered, caused in all or in part, by errors and/or omissions relative to the collection, compilation and/or interpretation of data. Copyright[®] 2016 by Vertima Inc.

